



PORTAFILL RADIAL CONVEYORS TECHNICAL SPECIFICATION

CW65 (65ft / 20m conveyor)

CONVEYOR

- 750mm wide belt
- Disc return rollers
- Slatted tail drum
- Ram covers
- Hydraulically lifting and lowering
- Impact bed and feed boot as standard
- Transport 4 x CW65 units in 40ft container

UNDERCARRIAGE

- Single axle
- Wheels adjust to allow radial movement

POWER

- Coupled onto suitable primary machine or power pack

OPTIONS

- 800mm wide belt
- 900mm wide belt
- Chevron belt


STOCKPILE CAPACITY

- CW65 – 400m³

**All drawing dimensions approximate and in millimetres. Portafill International reserves the right to alter the specification of these machine without notice.*



Dimensions

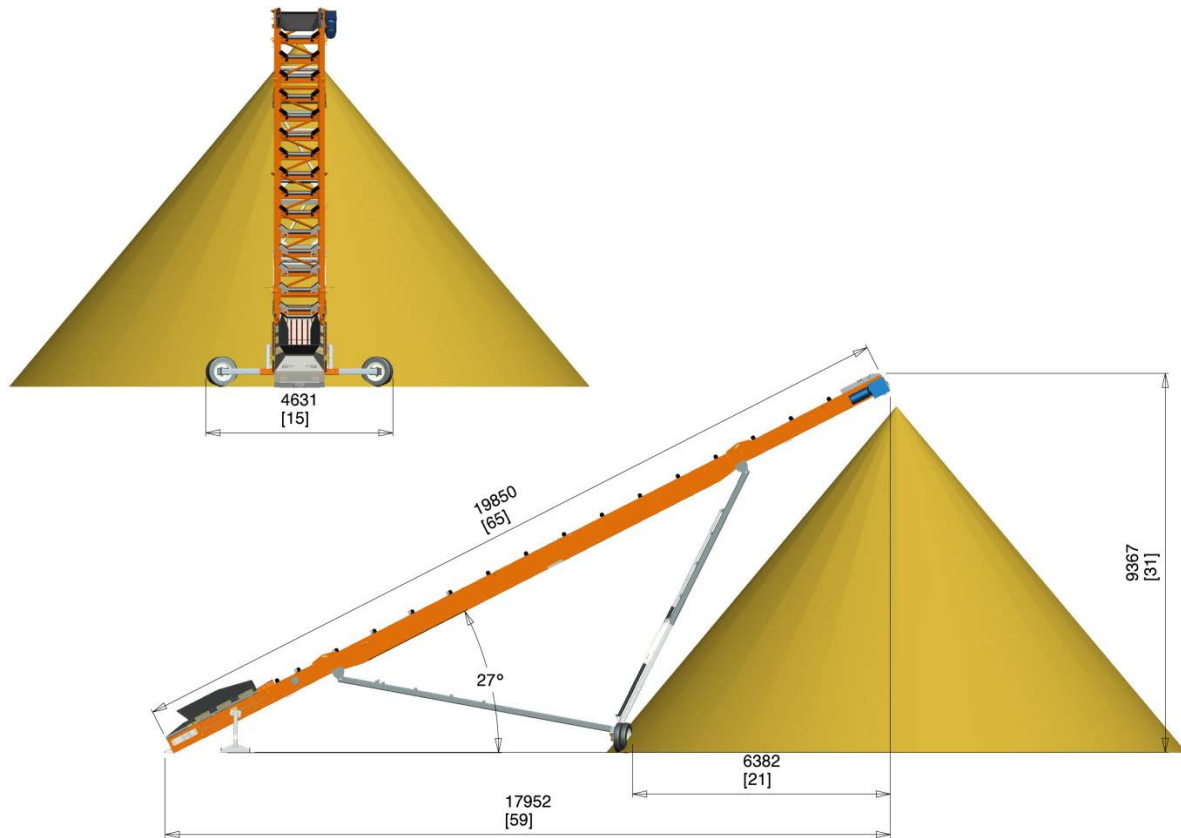

**All drawing dimensions approximate and in millimetres. Portafill International reserves the right to alter the specification of these machine without notice.*