



PORTAFILL TRACKED CONVEYORS TECHNICAL SPECIFICATION

TC60 (60ft / 18m conveyor)

CONVEYOR

- 900mm wide belt
- Feed boot impact bed
- Disc return rollers
- Slatted tail drum
- Ram covers
- Hydraulic oil cooler
- Snug drum

POWER

- CAT 2.2 (EU Stage IIIA, Tier 4 Interim Compliant) Diesel Engine
- 100 L Capacity (Approx.) Diesel Tank
- 380 L Capacity (Approx.) Hydraulic Tank
- Additional bulkhead to power extra conveyor (only if single drive)

TRACKS

- Track shoe – 400mm
- Dog lead remote control

OPTIONS

- Deutz D2011 L04i (EU Stage IIIA, Tier 4 Interim Compliant) Diesel Engine
- Radio remote control for tracks
- Dual drive
- Chevron belt
- Electric hydraulic drive

WEIGHT

- 9,970KGS

**All drawing dimensions approximate and in millimetres. Portafill International reserves the right to alter the specification of these machine without notice.*




PORTAFILL




**All drawing dimensions approximate and in millimetres. Portafill International reserves the right to alter the specification of these machine without notice.*


Working Dimensions

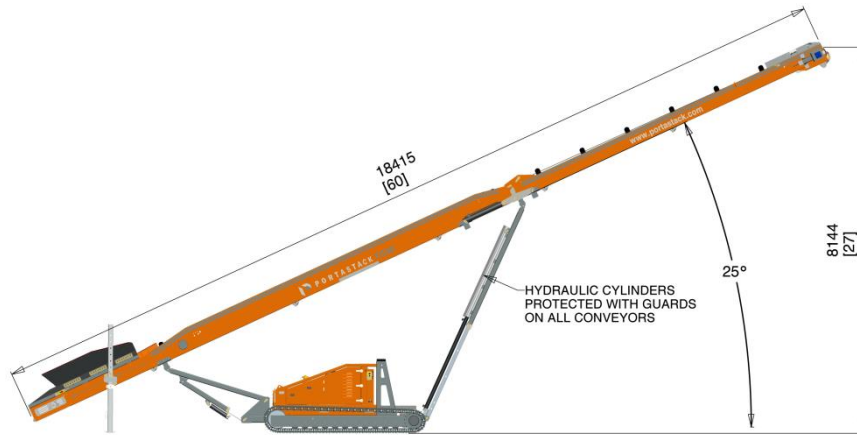

Transport Dimensions

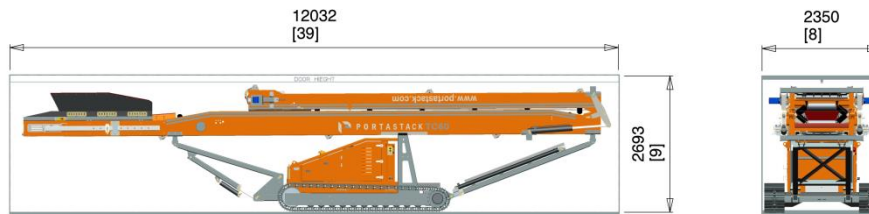

Stockpile Capacity

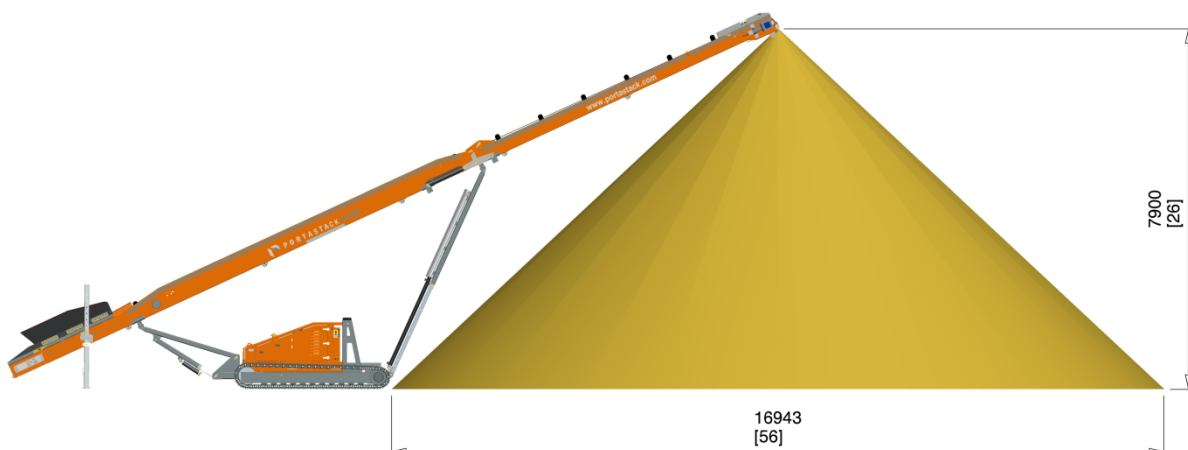

STOCKPILE VOLUME: 594 m³

**All drawing dimensions approximate and in millimetres. Portafill International reserves the right to alter the specification of these machine without notice.*



Powerunit Options


POWERUNIT ENGINE OPTIONS



CATERPILLAR C2.2 37.0 kW/49.8 bhp



DEUTZ D2011 L041 (TIER III COMPLIANT)
DIESEL 41 kW (55HP)

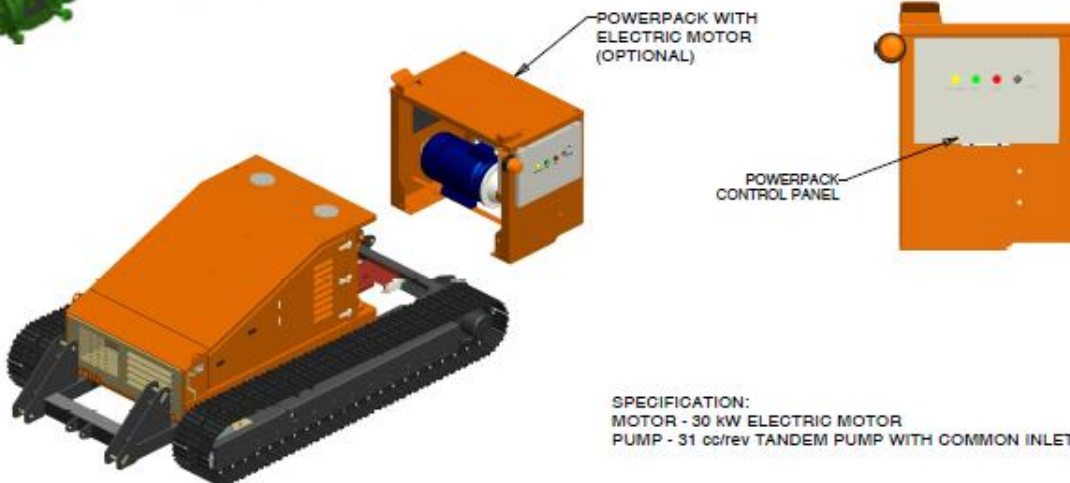

SPECIFICATION:
MOTOR - 30 kW ELECTRIC MOTOR
PUMP - 31 cc/rev TANDEM PUMP WITH COMMON INLET

**All drawing dimensions approximate and in millimetres. Portafill International reserves the right to alter the specification of these machine without notice.*